

4V400 系列电磁阀、气控阀

4V400 Series Solenoid Valve, Pneumatic Control Valve



订购码 | Ordering Code

4V	4	10	-	15	B	AC220V	-	W
规格代码 4V:二(三)位五通电磁阀 4A:二(三)位五通气控阀 3V:二位三通电磁阀 3A:二位三通气控阀 Specification Code 4V:Two (Three)-position Five-way Solenoid Valve 4A:Two (Three)-position Five-way Pneumatic Control Valve 3V:Two-position Three-way Solenoid Valve 3A:Two-position Three-way Pneumatic Control Valve	系列代码 400 系列 Series Code 400 Series	线圈及位数 10:单头双位置 20:双头双位置 30C:双头三位置封闭型 30E:双头三位置排气型 30P:双头三位置压力型 Coil and Places 10:Single-head Double-position 20:Double-head Double-position 30C:Double-head Three-position Close Type 30E:Double-head Three-position Exhaust Type 30P:Double-head Three-position Pressure Type	接管口径 Joint Pipe Bore 15: 1/2"	接管形式及初始状态 空白:管接式 B:二位五通板接式 三位五通板接式 NC:二位三通常闭型 NO:二位三通常开型 Joint Pipe Form and Initial State Blank:Pipe Connection Type B:Two-position Five-way Plate Connection Type Three-position Five-way Plate Connection Type NC:Two-position Three-way Normal Close Type NO:Two-position Three-way Normal Open Type	标准电压 Standard Voltage DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	接线形式 空白:标准端子式 LD:棕色带灯端子式 LD:白色带灯端子式 W:引线式 Wiring Form Blank:standard Connector LD:Brown with Lighting Connector LD:White with Lighting Connector W:Lead Wire Type		

规格 | Specification


型号 Model	4V410-15	4V420-15	4V430C-15	4V430E-15	4V430P-15
位通数 Position and Way NO.	二位五通 Two-position Five-way		二位五通 Two-position Five-way		
有效截面积 Effective Sectional Area	50mm ² (CV=2.79)		30mm ² (CV=1.68)		
型号 Model	3V410-15	3V420-15	3A410-15	3A420-15	
位通数 Position and Way NO.	二位三通 Two-position Three-way				
有效截面积 Effective Sectional Area	50mm ² (CV=2.79)				
接管口径 Joint Pipe Bore	进气=出气=排气=G1/2" Air Inlet=Air Outlet=Exhaust=G1/2"				
工作介质 Working Medium	经40微米过滤的空气 40 Micron Filtered Air				
动作方式 Motion Pattern	内部先导式 Inner Guide Type				
使用压力 Working pressure	0.15~0.8MPa				
最大耐压力 Max. Pressure Resistance	1.2MPa				
工作温度 Operating Temperature	5~50℃				
电压范围 Voltage Range	± 10%				
耗电量 Power Consumption	AC: 4.5VA DC: 3W				
绝缘性及防护等级 Insulation & Protection Class	F级. IP65 F Class. IP65				
接线形式 Wiring Form	出线式或端子式 Lead Wire or Connector type				
最高动作频率 Highest Action Frequency	每秒五次 5 Cycle / Sec				
最短励磁时间 Shortest Excitation Time	0.05秒 0.05 Second				

4V400 系列电磁阀、气控阀

4V400 Series Solenoid Valve, Pneumatic Control Valve

外形尺寸 | Overall Dimension



4V410-15

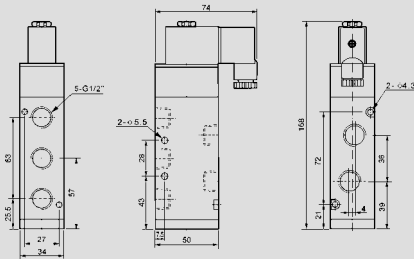


4V420-15




4V430-15

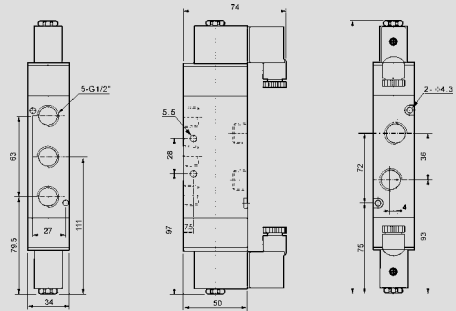


4A410-15

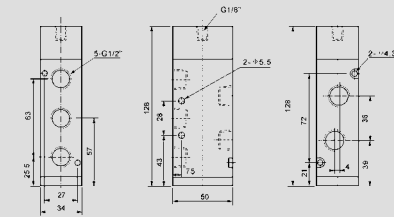



4A420-15




4A430-15

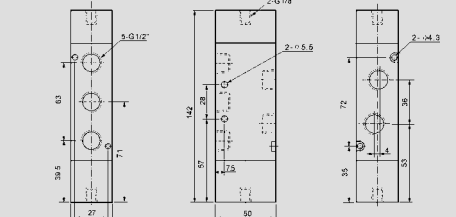



3V410-15

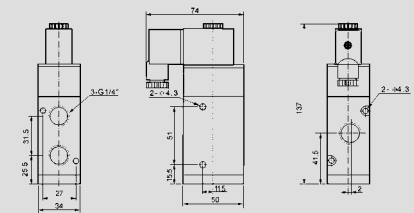

3V420-15

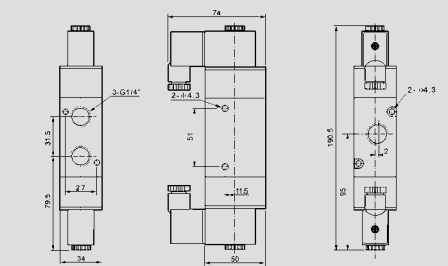

3A410-15

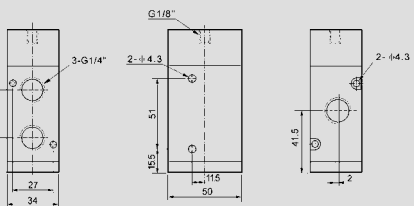

3A420-15

